

Dromex



STANDARD DUTY PVC GLOVES



GPVC/35



GPVC/27

Description


Dromex® GPVC/27 and GPVC/35 are thermoplastic PVC (Poly Vinyl Chloride), 27cm and 35cm length gloves, in ruby red colour with a synthetic coating on a polyester interlock liner and an open cuff allowing ventilation and quick removal of glove. These gloves provide excellent resistance to most basic acids, oils fats caustics and petroleum hydrocarbons. In addition it provides abrasion resistance for both wet and dry applications, as well as being useful with alcohols and glycol ethers at the specified levels of exposure as indicated by the CE ratings. PVC functions well between temperatures of -4°C & 66°C.

Special Instructions

Although the manufacturer has examined these gloves under the system for ensuring quality of production by means of monitoring and inspection, we recommend that all gloves should be thoroughly inspected before use to ensure no damage is present.

None of the materials or processes used in the manufacture of these products are known to be harmful to the wearer. The gloves and information contained herein are designed to accommodate the basic safety requirements and standards for Personal Protective Equipment. Actual conditions of use cannot be directly simulated in a test environment, therefore it is the responsibility of the user and not the manufacturer or supplier to determine the suitability for intended use.

EN 388:XXXX



4121

Compliance & Conformity


Tested in accordance with the European directive for PPE (89/686/EEC) for complex design, and is compliant with EN 420 for innocuousness and EN 388 Mechanical Risks.

Specifications

Style: Fully dipped with open cuff
 Liner: Polyester cotton liner
 Palm: Smooth finish
 Cuff: Open cuff
 Mass: GPVC/27 +-150g per pair (size 10)
 GPVC/35 (±5g) 190g per pair (size 10)
 Functioning Temperature: -4°C to 66°C

Packaging, Storage & Obsolescence

GPVC/27 sold as 120 pairs per carton for shipping.
 GPVC/35 sold as 70 pairs per carton for shipping.
 Store in a cool, dry place.
 Stored correctly, the gloves physical properties will not change for up to five years.



Cleaning & Maintenance

Gloves should not be left in a contaminated condition if re-use is intended especially if potential hazards exist. Before removal from the hands excess contaminant should first be removed. Should this not be possible, it is advisable to ease left and right hand gloves off using the gloved hand and remove the gloves without the contaminant contacting the bare hands. The gloves may then be decontaminated with mild detergent solution, then rinsed with clean water and dried ideally with some air movement.

Disposal

All industrial waste should be disposed of correctly according to local regulations and good disposal practice. Gloves should be disposed of considering the hazardous substances they were used for. Please consider recycling.


Sizes Available

Code	Size	Palm Length
GPVC/27	L/10	125mm (±5mm)
GPVC/35	L/10	125mm (±5mm)


** As per the EN420 standard, actual measurement of gloves are determined by the manufacturer, taking into account the behaviour of the glove material, its thickness (such as leather gloves, PVC gloves etc), elasticity and the intended use.*

** Sizing charts only serve as a guide. Sizes and measurements are for reference only. In order to make an informed decision, always try on the gloves as each glove features a unique construction to accommodate a wearer's preferences.*

Measurement Guide



Materials

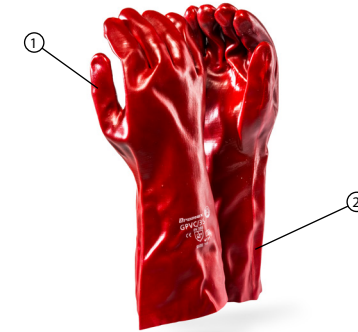

- 1 Fully dipped
2. Open cuff

Marking

GPVC/27



GPVC/35



Dromex: Unit 1, 1 Blase Road, New Germany, 3620, South Africa
 T. +27(31) 713 1960 E. info@dromex.co.za
 www.dromex.co.za